






866.332.2403 (Toll Free); 7am-7pm Pacific Time, Monday-Saturday

Assembly Instructions for: **HERITAGE PICNIC TABLES (ATTACHED BENCHES)**

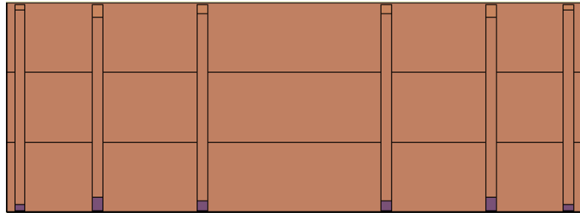

Thank you for purchasing Forever Redwood patio furniture. Forever Redwood is built by Old-Growth Again Restoration Forestry (OGA). OGA is dedicated to restoration forestry. Sales of patio furniture finance our restoration work in California redwood forestlands.


Content of boxes

Quantity	Description	Drawing
1	Table Top	
2	Benches	
2	Diagonal Supports	
4	Legs	
2	Short Leg Supports	
2	Long Leg Supports	
16	Carriage Bolts 5/16" x 3 1/2", Washers and Nuts	
16	Carriage Bolts 5/16" x 4 1/2", Washers and Nuts	


The parts that go together have the same numbers written next to the predrilled holes they attach to. Align the parts with the numbers as shown for ease of reference

Tools required: 1/2-inch ratchet and a mallet or small hammer.


Step 1: Attach one long leg support and one short leg support to 2 legs as shown below. Make sure the numbers on the legs match up with the numbers on both supports. Align the leg to the predrilled holes, tap the bolts all the way in (set the bolt into the wood), add a washer and tighten the nut. Repeat this step for the other 2 legs.

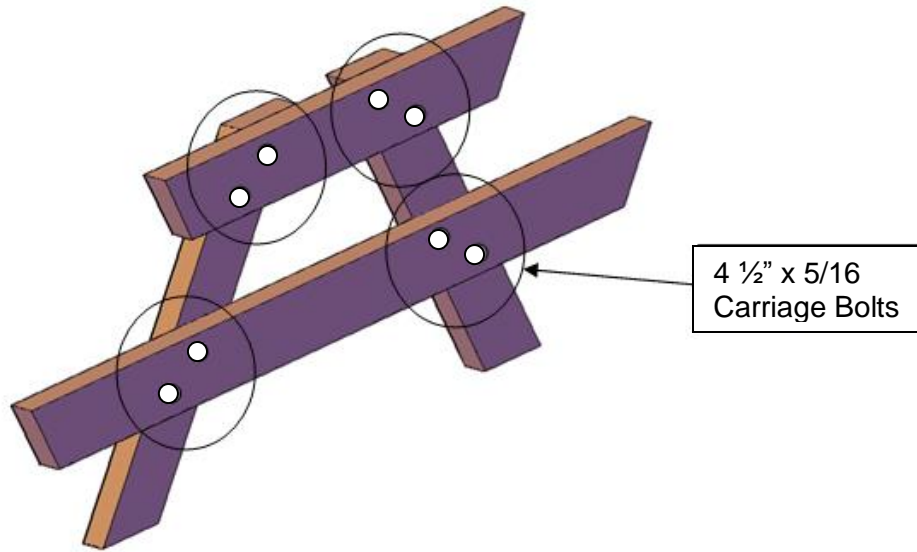

Step 2: Turn your tabletop upside down and attach one leg assembly to tabletop with 2 carriage bolts (3 1/2" x 5/16), washers and nuts per side. Match up the numbers on the leg to the numbers on the tabletop's underside. Orient the leg so that it slopes outward as shown. Align the leg to the predrilled holes, tap the bolts all the way in (set the bolt into the wood), add a washer and tighten the nut. Make sure you are attaching the correct side. Insert washer, nut and tighten with 1/2 inch ratchet. Do not over tighten or you'll crush the redwood and weaken the table's structural strength. Repeat this step to attach the other leg assembly to the tabletop.

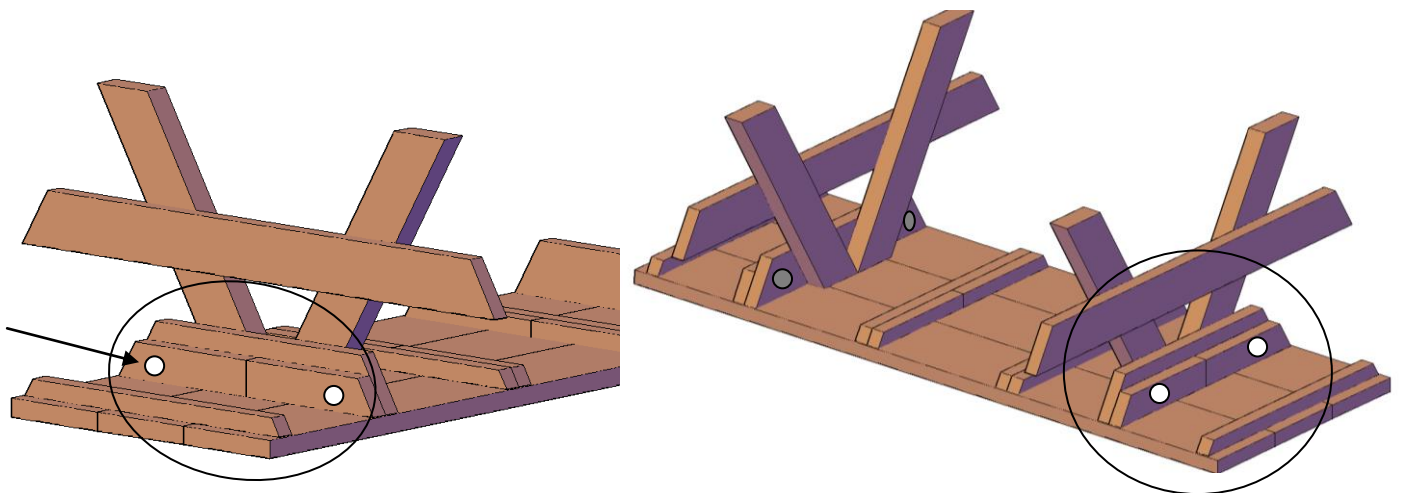


Step 3: Attach diagonal support to leg and tabletop with one carriage bolt (3 1/2" x 5/16), washer and nuts per side. Make sure that the numbers written next to the predrilled holes match. Repeat this step for the other diagonal support.

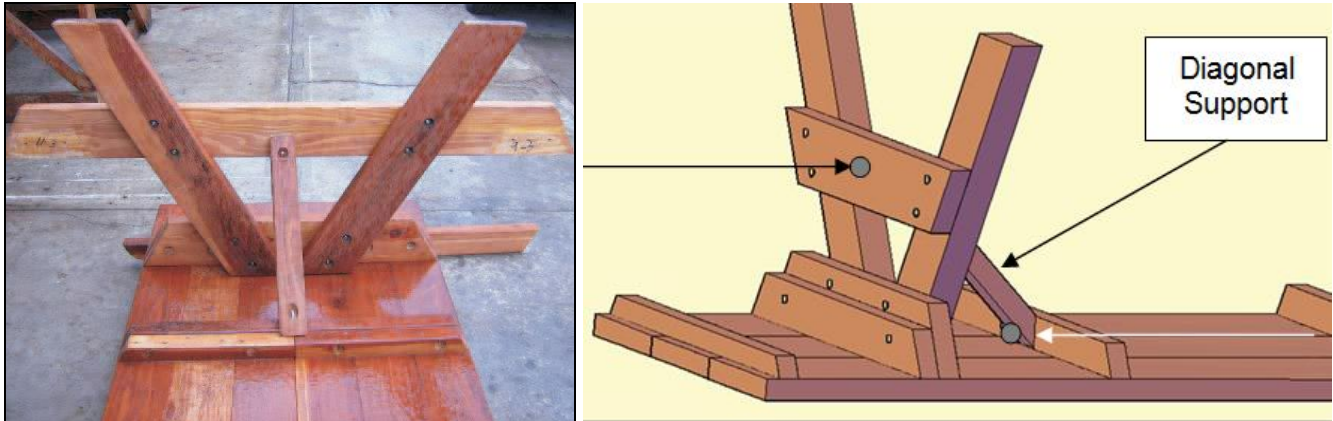

Carefully turn the table around. Be careful not to place all the weight of the table on one leg – the table is very heavy and can damage the point where the leg attaches if too much stress is placed on that point.

Step 4: Attach seat to long leg supports with two carriage bolts (3 1/2" x 5/16), washers and nuts per side. Repeat this step to attach the other seat.

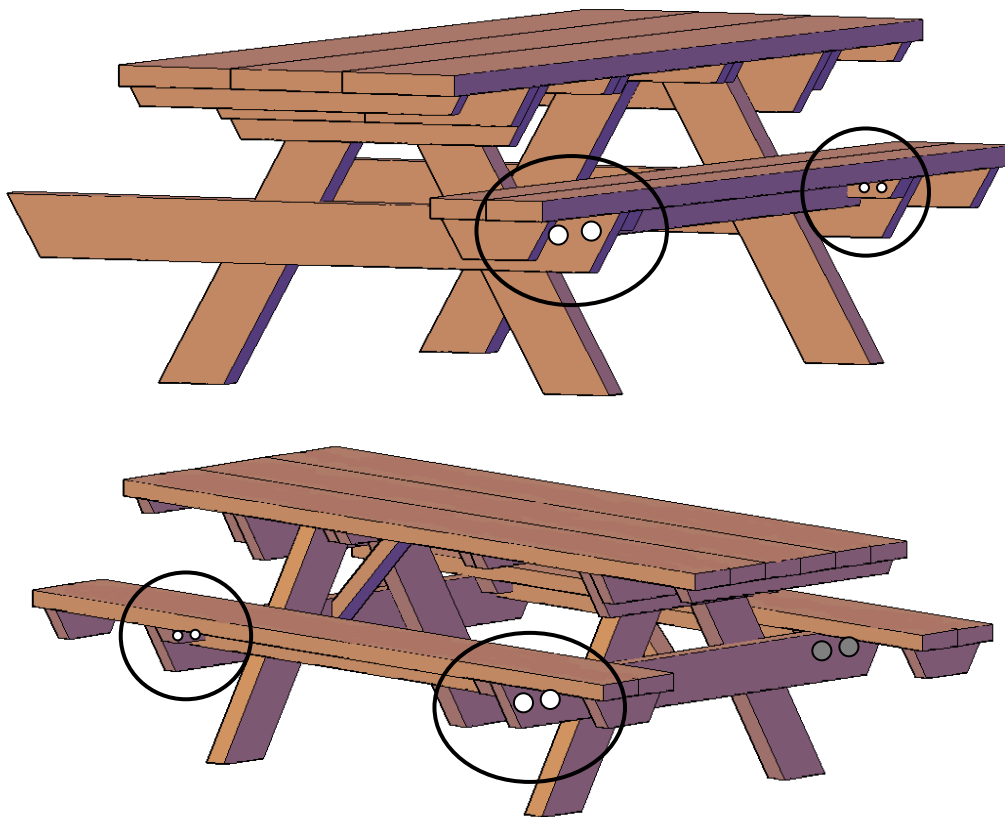

Thank you. If you have any questions, please call or email us.