

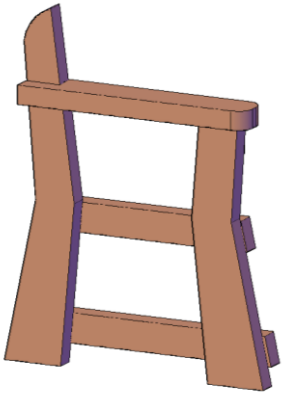



866.332.2403; Outside the US: 619.600.5630 8am-5pm Pacific Time, Monday-Friday

Assembly Instructions for: **HERITAGE REDWOOD BENCH**

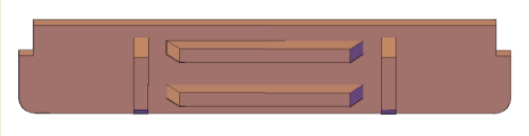

CONTENT OF BOXES

Quantity	Description	Drawing
1	Seat	
1	Backrest	
2	Sides	
2	Diagonal Supports	
2	Carriage bolts 5 1/2" x 5/16", Washers and Nuts	
10	Carriage bolts 3 1/2" x 5/16", Washers and Nuts	


ASSEMBLY INSTRUCTIONS

Thank you for purchasing Forever Redwood patio furniture. Forever Redwood is built by Old-Growth Again Restoration Forestry (OGA). OGA is dedicated to restoration forestry. Sales of patio furniture finance our restoration work in California redwood forestlands.


Tools required: ½-inch ratchet and a mallet or small hammer.

Unpack your bench and make sure you have all the parts. The parts that go together have the same numbers written next to the predrilled holes they attach to. Align the parts with the numbers as shown for ease of reference.


Step 1: Attach sides to seat with 2 carriage bolts, washers and nuts per side. Match the numbers written next to the predrilled holes on each piece. Tap in the carriage bolts from the outside edge into the holes. Tap the bolts in all the way, then insert the washer and nut and tighten with a ½- inch ratchet. The bolts should tap into their holes. If you have to force a bolt, the piece is probably on the wrong side or is turned around. Do not over tighten or you'll crush the redwood and weaken the bench's structure.

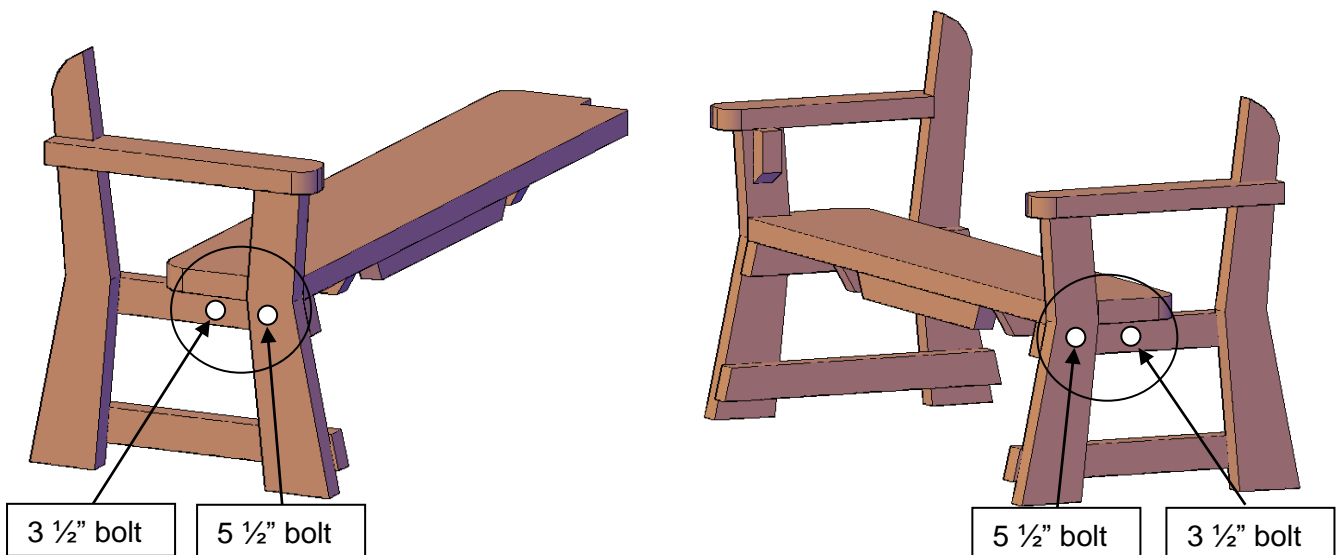

Step 2: Attach backrest to sides with 2 carriage bolts, washers and nuts per side. The backrest also has predrilled holes on each edge. Match the numbers to the predrilled holes on the side pieces. Tap in the 3 ½” carriage bolts to attach the seat to the bench side. Tap the bolts in all the way, then insert the washer and nut and tighten with a ½-inch ratchet. Do not over tighten or you’ll crush the redwood and weaken the bench structure. Repeat for other side.

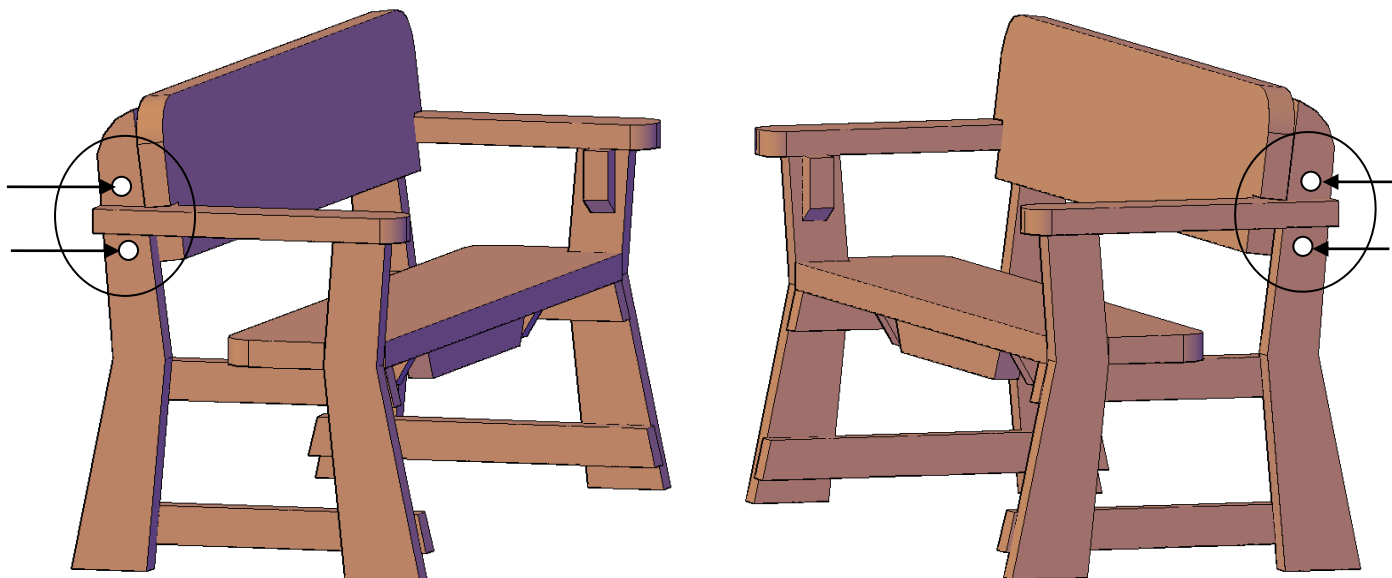

Step 3: Attach diagonal supports to seat and sides with 2 carriage bolts (3 ½” x 5/16), washers and nuts per support.

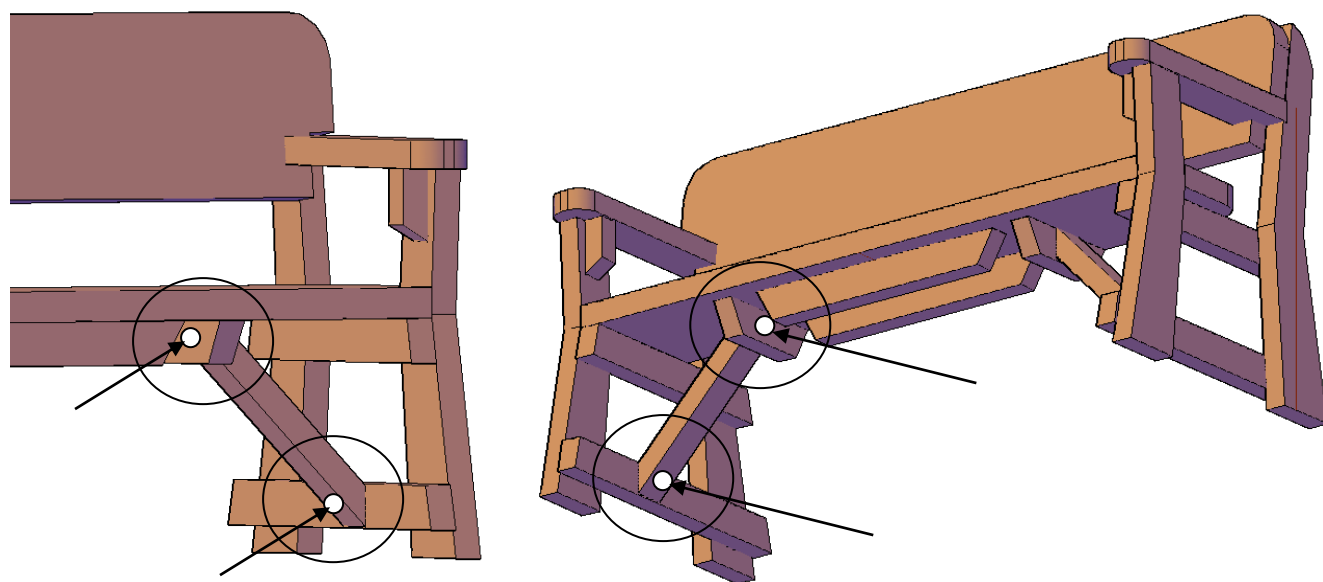

Thank you. If you have any questions, please call or email us.